

LFP602DB High Precision DC Motor Peristaltic Pump

FEATURES

- The pump head features a new quick-release structure that is stable and reliable, making maintenance and servicing more convenient. installation in limited space
- Compact design with a small footprint, allowing single-pump
- Compatible to multiple specifications of tubes, covering a wide range of flow rates
Installation method can be customized
- High flow repeatability, long-term accuracy
- Reliable protection against condensation ingress (waterproof version)




SPECIFICATIONS

Model	Installation Method	Motor Type	Control Method	Function	Working Voltage	Power	Weight	Working Environment	Rollers
P602DB. G	Two mounting options	High-precision motor	Power-on operation	Fixed flow rate	DC24V	≤32W	845g	Temperature 0-45°C, Relative Humidity <85%RH	Standard with 3 rollers

FLOW RATE: ml/min

Voltage	Flow Range	Tube Size	Tube Type
DC24V	1112~2205	26#	BPT Tube/Silicone Tube/A60-F/Viton Tube
	1703~3213	35#	
	2131~4095	36#	

MOUNTING DIMENSION: mm

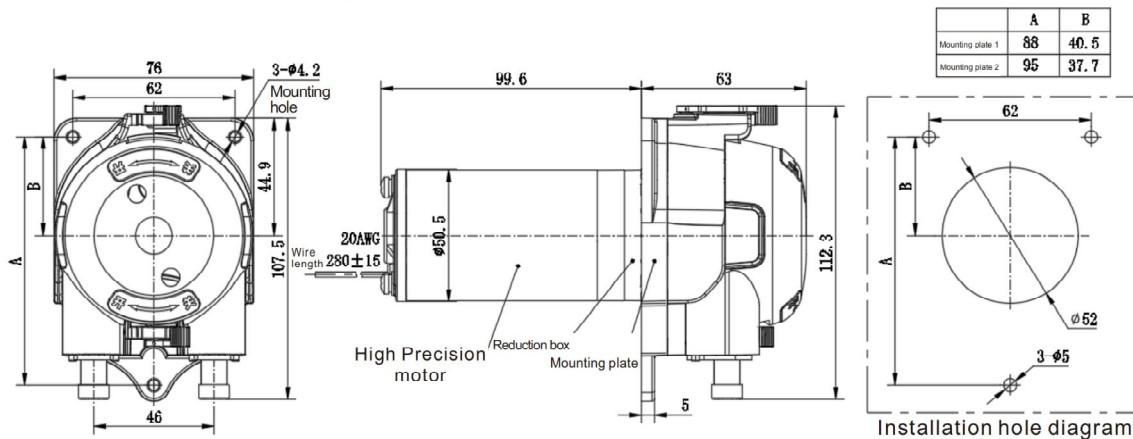

Remark

1. The above flow parameters are tested under the conditions of room temperature 23°C, standard atmospheric pressure, clean water, suction lift 0.2m, lift 0, and no pressure. For reference only.
2. Pump flow rate can be affected by viscosity, density, medium temperature, ambient temperature, inlet and outlet pressure, suction lift and lift of pump. To ensure the accuracy of the pump, it is necessary to keep the above factors without significant changes.