

LFP303ADB High Precision DC Motor Peristaltic Pump

FEATURES

- High flow repetition accuracy, High accuracy of the overall lifespan
- Low noise, Long life, High stability
- Prevent condensate from entering the motor
- Easy tube replacement without tools




SPECIFICATIONS

Model	Installation Method	Motor Type	Control Method	Function	Working Voltage	Power	Weight	Working Environment	Rollers
P303ADB. G	Built-in mounting hole	High precision motor	Power-on operation	Fixed flow rate	DC12V、DC24V	≤12W	340g	Temperature 0-45℃, Relative Humidity <85%RH	Standard with 2 rollers+2 trainingwheels

FLOW RATE: ml/min

Voltage	Flow Range	Tube Size	Tube Type
DC12V、DC24V	210~450	16#	BPT Tube/Silicone Tube/A60-F/Viton Tube
	380~950	25#	
	550~1400	17#	

MOUNTING DIMENSION: mm

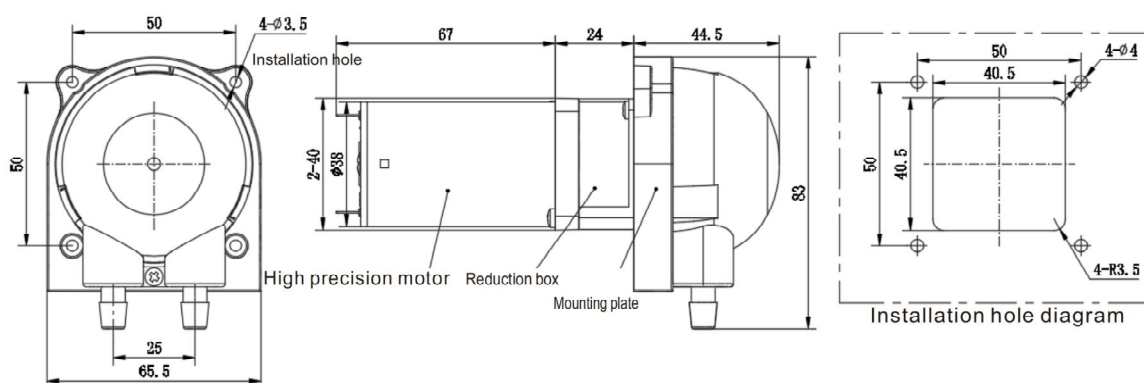

Remark

- 1.The above flow parameters are tested under the conditions of room temperature 23°C, standard atmospheric pressure, clean water, suction lift 0.2m, lift 0, and no pressure. For reference only.
2. Pump flow rate can be affected by viscosity, density, medium temperature, ambient temperature, inlet and outlet pressure, suction lift and lift of pump. To ensure the accuracy of the pump, it is necessary to keep the above factors without significant changes.